


Station 030:
 Automatic handling of the mixer cartridge
 and following execution on the FAUCET of:
 • Closed cartridge air leakage test, by the hot inlet
 • Closed cartridge air leakage test, by the cold inlet
 • flow air test

Station 020:
 Automatic tightening of:
 • the RING NUT
 • the DIVERTER
 • the SHOWER CONNECTION

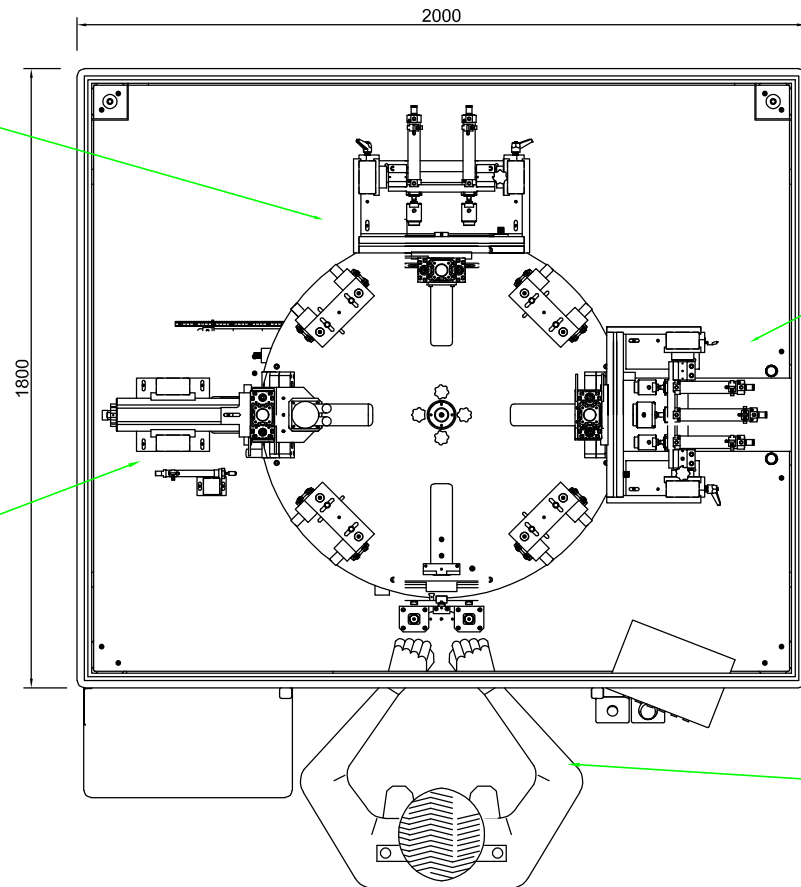

Station 040:
 Open cartridge air leakage test
 and DIVERTER

Station 010:
 Manual execution of the following operations:
 • Unloading of the assembled and tested FAUCET
 • SEATS and CAPS screwing
 • FAUCET screwing on pallet
 • Inserting the MIXER CARTIDGE
 • Inserting and pre-tightening the RING NUT, the
 DIVERTER and the SHOWER CONNECTION

ASSEMBLY AND TESTING MACHINE FOR SHOWER AND BATH MIXERS